




**6075**  
**6065**  
**6055**

OFFICE SOLUTIONS

## Product Specifications

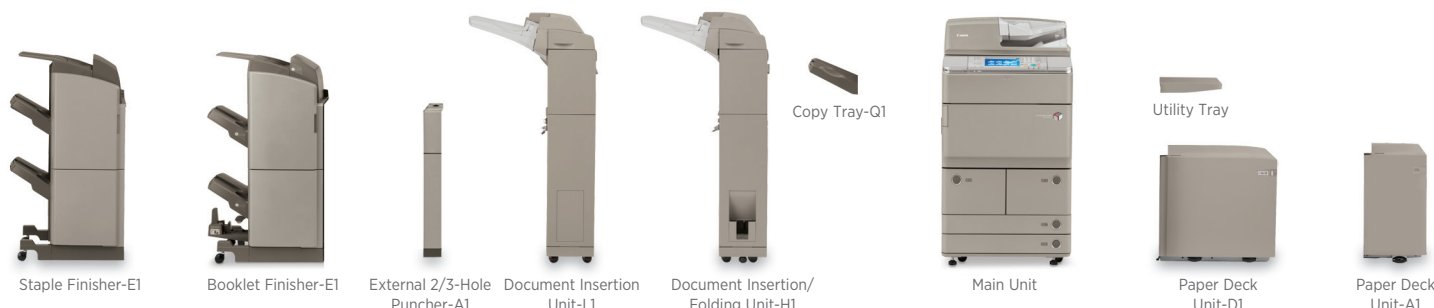

### Main Unit

#### System Type

Digital Multifunction Imaging System

#### Functions

Standard: Copy, Print (UFR II), Scan, Send, Store  
Optional: Print (PCL, Adobe® PostScript® 3™), Fax (up to 4 lines)

#### Operation Panel

Standard: 8.4" SVGA Full-color, TFT Screen  
Optional: 10.4" SVGA Full-color, TFT Upright Screen

#### Memory

Standard: 1.5GB RAM  
Maximum: 2GB RAM

#### Hard Disk Drive

Standard: 80GB  
Maximum: 250GB

#### Mirroring Hard Disk Drive

Optional (80GB, 250GB), Method: RAID1

#### Network Interface Connection

Standard: 10/100/1000Base-TX  
Optional: Wireless LAN (IEEE 802.1x)

#### Other Interface

Standard: USB 2.0 (Host)x2, USB 2.0 (Device)  
Optional: Device Port [USB 2.0 (Host)x2], Serial Interface, Copy Control Interface

#### Copy/Print Speed

Letter: **6075:** Up to 75 ppm  
**6065:** Up to 65 ppm  
**6055:** Up to 55 ppm

11" x 17": **6075:** Up to 37 ppm  
**6065:** Up to 32 ppm  
**6055:** Up to 32 ppm

#### Paper Sources (20 lb. Bond)

Standard: Dual 1,500-sheet Drawers  
Dual 550-sheet Cassettes  
100-sheet Stack Bypass

Optional: 3,500-sheet Paper Deck-A1 or  
3,500-sheet Paper Deck-D1

Maximum: 7,700 Sheets  
(with optional Paper Deck)

#### Output Paper Capacity (20 lb. Bond)

250 Sheets (with Copy Tray)  
4,000 Sheets (with Staple Finisher or Booklet Finisher)

#### Output Paper Sizes

Drawers: Letter  
Cassettes: 11" x 17", Legal, Letter, Letter-R, Executive, Statement-R, Custom Size [5-1/2" x 7-1/8" to 11-3/4" x 19-1/4" (140mm x 182mm to 297mm x 488mm)]  
Bypass: 11" x 17", Legal, Letter, Letter-R, Executive, Statement-R, Custom Size [4" x 5-7/8" to 11-3/4" x 19-1/4" (100mm x 148mm to 297mm x 488mm)]

#### Acceptable Paper Weight

Drawers/Cassettes: 14 lb. Bond to 80 lb. Cover (52 to 220g/m<sup>2</sup>)  
Bypass: 14 lb. Bond to 140 lb. Index (52 to 256g/m<sup>2</sup>)

#### Duplexing

Paper Size: Standard Automatic Trayless Duplexing (up to 11" x 17")

Paper Weight: 14 lb. Bond to 80 lb. Cover (52 to 220g/m<sup>2</sup>)

#### Special Media Support

Cassettes: Tab  
Bypass: Transparency, Tracing, Labels

#### Warm-up Time

From Power On: 38 Seconds or Less

From Sleep Mode: 30 Seconds or Less

From Energy Saver Mode: Approximately 20 Seconds

#### Power Requirements

120-127V AC 60Hz, 16A

#### Plug

NEMA 5-20P

#### Power Consumption

Maximum: 2.0kW or Less

Sleep Mode: 1W or Less

Energy Saver Mode: 158Wh or Less (-50% is selected)

#### Dimensions (H x W x D)

48" x 25-3/8" x 30-3/8"  
(1220mm x 645mm x 770mm)

#### Installation Space (W x D)

53-5/8" x 30-3/8" (1362mm x 770mm)  
(when Booklet Finisher is attached, and Stack Bypass and Auxiliary Tray are extended)

#### Weight

Approximately 522.5 lb. (237kg)\*

#### Toner (Estimated Toner Yield)

56,000 Images @ 6% Coverage



**6075**  
**6065**  
**6055**

## Main Unit (continued)

### Image Reader Unit

#### Scan Resolution

Up to 600 dpi x 600 dpi\*\*

#### Acceptable Originals (Glass)

Sheet, Book, 3-Dimensional Objects (up to 4.4 lb.)

#### Maximum Original Size

Up to 11" x 17"

### Document Feeder

#### Scan Method

Single-pass Duplexing Automatic Document Feeder

#### Acceptable Originals

Paper Size: 11" x 17", Legal, Letter, Letter-R, Statement, or Statement-R

Paper Weight: Originals: 13 lb. Bond to 80 lb. Cover (50 to 220g/m<sup>2</sup>)  
Color Originals: 17 lb. Bond to 80 lb. Cover (64 to 220g/m<sup>2</sup>)

#### Scan Speed (BW/Color; Letter)

Simplex: 120/85 ipm (300 dpi)  
120/51 ipm (600 dpi)\*\*

Duplex: 200/100 ipm (300 dpi)  
120/51 ipm (600 dpi)\*\*

#### Paper Capacity (20 lb. Bond)

300 Sheets

### Copy Specifications

#### First-Copy-Out Time (Letter)

6075: 3.1 Seconds or Less

6065/6055: 3.3 Seconds or Less

#### Multiple Copies

1 to 9,999

#### Copy Exposure

Automatic or Manual (9 levels)

#### Magnification

From Platen Glass: 25% - 400% (1% increments)

From ADF: 25% - 200% (1% increments)

#### Preset Reductions

25%, 50%, 64%, 73%, 78%

#### Preset Enlargements

121%, 129%, 200%, 400%

#### Basic Copy Features

Preset R/E Ratios by Area, Finishing, Two-sided, Density/Exposure Adjustment, Original Type Selection, Interrupt Mode, Sample Set, Setting Confirmation/Cancel, Standard Keys, Reset, Guide Display, Job Duration Display, Reserved Copying

#### Special Copy Features

Two-page Separation, Booklet, Job Build, N on 1, Add Cover, Sheet Insertion, Different Size Originals, Transparency Cover Sheets, Page Numbering, Copy Set Numbering, Sharpness, Erase Frame, Watermark, Print Date, Shift, Gutter, Print & Check, Negative/Positive, Repeat Images, Merge Job Block, Job Done Notice, Mirror Image, Print on Tab, Store in Mail Box, Superimpose Image, Favorites Setting, Previous Settings, Secure Watermark (Optional)

### Print Specifications

#### Processor

Canon Dual Custom Processor (Shared)

#### Memory

Standard: 1.5GB RAM

Maximum: 2GB RAM

#### Hard Disk Drive

Standard: 80GB

Maximum: 250GB

#### Engine Resolution

1200 x 1200 dpi

#### PDL Support

Standard: UFR II

Optional: PCL 5e, PCL 6, Adobe PostScript 3

#### Print Driver Supported OS

UFR II: Windows® (Windows 2000/XP/7/Server 2003/Server 2008/Windows Vista®), Citrix MetaFrame, Macintosh® (OS X 10.4.9 or later)

PCL 5e/6: Windows (Windows 2000/XP/7/Server 2003/Server 2008/Windows Vista), Citrix MetaFrame

Adobe PS 3: Windows (Windows 2000/XP/7/Server 2003/Server 2008/Windows Vista), Citrix MetaFrame, Macintosh (OS X 10.4.9 or later)

XPS: Windows Vista, Windows Server 2008, Windows 7

#### Direct Print Support

Standard: TIFF, JPEG, EPS\*\*\*

Optional: PDF, XPS\*\*\*

#### Print Features

Suspend Job Timeout, Subset Finishing (PS only), Profile Settings, Secured Print, Watermark, Page Border, Header/Footer, Page Layout, Two-sided Printing, Collating, Booklet Printing, Grouping, Mixed Paper Sizes/Orientations, Offsetting, Printing on Transparencies, Front/Back Covers, Toner Save, Poster Printing

### Scan Specifications

#### Network TWAIN Scan

Standard

#### Network Scan Utility

Color Network ScanGear

### Universal Send Specifications

#### Sending Method

E-Mail, I-Fax, SMB, File Server (FTP, SMB, WebDAV), Mail Box, Super G3 Fax (Optional)

#### Color Mode

Auto Color Select (Color, Gray), Auto Color Select (Color, Black), Full Color, Grayscale, BW

#### Scan Resolution (dpi)\*\*

600 x 600, 400 x 400, 300 x 300, 200 x 400, 200 x 200, 200 x 100, 150 x 150, 100 x 100

#### Address Book Capacity

Maximum 1,800 Destinations (including 200 One-Touch Buttons)

#### Communication Protocol

File: FTP (TCP/IP), SMB (TCP/IP), WebDAV

E-mail/I-Fax: SMTP, POP3, I-Fax (Simple, Full)

#### File Format

Standard: TIFF, JPEG, PDF, PDF (Compact), PDF (Apply Policy), PDF (Optimize for Web), PDF/A-1b, XPS, XPS (Compact)

Optional: PDF (Trace & Smooth), PDF/XPS (OCR), PDF (Encrypted), PDF/XPS (Digital Signature), PDF (Reader Extensions)

#### I-Fax Data Format

BW: TIFF (MH, MR, MMR)

Color: TIFF (Profile-C)

#### Universal Send Features

Two-sided Original, Different Size Originals, Original Type Selection, Book to Two Pages, Density/Exposure Adjustment, Sharpness, Document Name, Copy Ratio, Erase Frame, Job Build, Delayed Send, Preview, Finished Stamp, Job Done Notice, File Name, Subject/Message, Reply-to, Sender's Name (TTI), E-mail Priority

### Fax Specifications

#### Maximum Number of Connection Lines

4

#### Modem Speed

Super G3: 33.6 Kbps

G3: 14.4 Kbps

#### Compression Method

MH, MR, MMR, JBIG

#### Resolution (dpi)

400 x 400, 200 x 400, 200 x 200, 200 x 100

#### Sending/Recording Size

Statement to 11" x 17"

#### Fax Features

Job Forwarding, Different-size Originals, Adjusting Overall Density for Scanning, Sharpness, Copy Ratio, Erase Frame, Job Build, Specifying the Sender's Name (when sending fax), Selecting the Telephone Line (when sending fax), Delayed Send, Preview, Finished Stamp, Job Done Notice, Original Type Selection, Two-sided Original, Book to Two Pages



**6075**  
**6065**  
**6055**

## Main Unit (continued)

### Store Specifications

<b>Mail Box</b>	
Number Supported:	100 User Inboxes, 1 Memory RX Inbox, 50 Confidential Fax Inboxes
Maximum Pages Stored:	8,000
<b>Advanced Box</b>	
Available Disk Space:	Approximately 10GB (Standard HDD), 113GB (250GB HDD)
Communication Protocol:	SMB <sup>1</sup> or WebDAV
Supported Client PC:	Windows (Windows 2000/XP/7 Windows Vista)
Maximum Number of Concurrent Connections:	SMB: 32, WebDAV: 12 (Active Sessions)
Advanced Box Features:	Disabling Advanced Box, Storage Filtering, Authentication for Advanced Box Log-in, Search Function, Sort Function, Printing a PDF File with a Password, imageWARE Secure Audit Manager Support
<b>Memory Media</b>	
Standard:	USB Memory
Optional:	SD, SDHC, CompactFlash, Memory Stick, Microdrive

### Security Features

<b>Standard</b>	
Department ID Management, Single Sign-On H, Access Management System (Device and Function Level Log-in), Secured Print, Trusted Platform Module, User Access Control of Advanced Box, Mail Box Password Protection, IPV6, Restricting Features (Restricting the Send Function, Restricting New Addresses on Address Book), SSL Encrypted Communication, SNMPv1/v3, MAC/IP Address Filtering, SMTP Authentication, POP Authentication before SMTP, HDD Format, Adobe® LiveCycle® Rights Management ES Integration	
<b>Optional</b>	
Removable HDD, HDD Erase, HDD Encryption/Mirroring, Encrypted Secure Print, Encrypted PDF, Document Scan Lock, IPsec, Secure Watermark	

### Environmental Information

- ENERGY STAR® Qualified
- Blue Angel
- RoHS Compliant
- WEEE Directive
- Ecomark

## Optional Accessories

### Paper Supply Options

<b>Paper Deck Unit-A1</b>	
Paper Capacity:	3,500 Sheets [20 lb. Bond (80g/m <sup>2</sup> )]
Number of Drawers:	1
Acceptable Paper Weight:	14 lb. Bond to 80 lb. Cover (52 to 220g/m <sup>2</sup> )
Acceptable Paper Type:	Thin, Plain, Heavy, Color, Recycled, Pre-punched
Acceptable Paper Size:	Letter
Power Source:	From Main Unit
Power Consumption:	Approximately 39W (Maximum)
Dimensions (H x W x D):	22-1/2" x 12-3/4" x 23" (570mm x 323mm x 583mm)
Weight:	Approximately 81.6 lb. (37kg)
<b>Paper Deck Unit-D1</b>	
Paper Capacity:	3,500 Sheets [20 lb. Bond (80g/m <sup>2</sup> )]
Number of Drawers:	1
Acceptable Paper Weight:	14 lb. Bond to 80 lb. Cover (52 to 220g/m <sup>2</sup> )
Acceptable Paper Type:	Thin, Plain, Heavy, Color, Recycled, Pre-punched
Acceptable Paper Size:	11" x 17", Legal, Letter, Letter-R
Power Source:	From Main Unit
Power Consumption:	Approximately 39W (Maximum)
Dimensions (H x W x D):	22-1/2" x 23-5/8" x 24-1/2" (570mm x 601mm x 621mm)
Weight:	Approximately 125.7 lb. (57Kg)

### Output Options

<b>Copy Tray-Q1</b>	
Total Output Capacity:	250 Sheets (20 lb. Bond)
Acceptable Paper Weight:	14 lb. Bond to 140 lb. Index (52 to 256g/m <sup>2</sup> )
Acceptable Paper Size:	11"x17", Legal, Letter, Letter-R, Executive, Statement-R, Custom Size [4" x 5-7/8" to 13" x 19-1/4" (100mm x 148mm to 330mm x 488mm)]
Dimensions (H x W x D):	6-7/8" x 16-1/2" x 15" (175mm x 420mm x 382mm)
Weight:	Approximately 2.4 lb. (1.1kg)

### Staple Finisher-E1

Number of Trays:	3
Total Output Capacity:	4,000 Sheets (Letter, Statement-R, Executive) <b>Tray A:</b> 250 Sheets (Letter, Statement-R, Executive) 125 Sheets (11" x 17", Legal, Letter-R) <b>Tray B:</b> 1,300 Sheets (Letter, Statement-R, Executive) 650 Sheets (11" x 17", Legal, Letter-R) <b>Tray C:</b> 2,450 Sheets (Letter) 1,700 Sheets (Statement-R, Executive) 650 Sheets (11" x 17", Legal, Letter-R)
Acceptable Paper Weight:	14 lb. Bond to 140 lb. Index (52 to 256g/m <sup>2</sup> )
Acceptable Paper Type:	Thin, Plain, Heavy, Color, Recycled, Pre-punched, Transparency, Tracing, Labels, Tab, Bond, Letterhead, Coated <sup>††</sup>
Acceptable Paper Size:	11" x 17", Legal, Letter, Letter-R, Executive, Statement-R, Custom Size [4" x 5-7/8" to 11-3/4" x 19-1/4" (100mm x 148mm to 297mm x 488mm)]
Staple Positions:	<b>Corner/Double Stapling:</b> 11" x 17", Legal, Letter, Letter-R, Executive
Maximum Stapling Capacity:	50 Sheets [20 lb. Bond (80g/m <sup>2</sup> )] (Letter, Executive), 30 Sheets [20 lb. Bond (80g/m <sup>2</sup> )] (11" x 17", Legal, Letter-R)
Paper Capacity of Staple Mode:	<b>Tray B/C:</b> 1,300 Sheets/100 Sets (Letter, Executive) 650 Sheets/50 Sets (11" x 17", Legal, Letter-R)
Type of Staple:	Staple-J1 (5,000 x 3)
Power Source:	From Main Unit
Power Consumption:	Approximately 108W (Maximum)
Dimensions (H x W x D):	44-1/8" x 25-5/8" (29-1/2" <sup>†††</sup> ) x 25-7/8" [1121mm x 649mm (748mm <sup>†††</sup> ) x 656mm]
Weight:	Approximately 106 lb. (48kg)



**6075**  
**6065**  
**6055**

## Optional Accessories (continued)

### Booklet Finisher-E1

Number of Trays:	3
Total Output Capacity:	4,000 Sheets (Letter, Statement-R, Executive)
	<b>Tray A:</b> 250 Sheets (Letter, Statement-R, Executive) 125 Sheets (11" x 17", Legal, Letter-R)
	<b>Tray B:</b> 1,300 Sheets (Letter, Statement-R, Executive) 650 Sheets (11" x 17", Legal, Letter-R)
	<b>Tray C:</b> 2,450 Sheets (Letter) 1,700 Sheets (Statement-R, Executive) 650 Sheets (11" x 17", Legal, Letter-R)
Acceptable Paper Weight:	14 lb. Bond to 140 lb. Index (52 to 256g/m <sup>2</sup> )
Acceptable Paper Type:	Thin, Plain, Heavy, Color, Recycled, Pre-punched, Transparency, Tracing, Labels, Tab, Bond, Letterhead, Coated <sup>††</sup>
Acceptable Paper Size:	11" x 17", Legal, Letter, Letter-R, Executive, Statement-R, Custom Size [4" x 5-7/8" to 11-3/4" x 19-1/4" (100mm x 148mm to 297mm x 488mm)]
Staple Positions:	<b>Corner/Double Stapling:</b> 11" x 17", Legal, Letter, Letter-R, Executive <b>Saddle-stitch:</b> 11" x 17", Legal, Letter-R
Maximum Stapling Capacity:	50 Sheets (Letter, Executive) [20 lb. Bond (80g/m <sup>2</sup> )] 30 Sheets [11" x 17", Legal, Letter-R (20 lb. Bond (80g/m <sup>2</sup> )]
Maximum Saddle-stitch Capacity:	16 Sheets [20 lb. Bond (80g/m <sup>2</sup> ) including one cover page up to 140 lb. Index (256g/m <sup>2</sup> )]
Paper Capacity of Staple Mode:	<b>Tray B/C:</b> 1,300 Sheets/100 Sets (Letter, Executive) 650 Sheets/50 Sets (11" x 17", Legal, Letter-R)
Paper Capacity of Saddle-stitch Mode:	1 to 5 Sheets/25 Sets 6 to 10 Sheets/15 Sets 11 to 16 Sheets/10 Sets
Type of Staple:	Staple-J1 (5,000 x 3) Staple Cartridge-D1 (2,000 x 3)
Power Source:	From Main Unit
Power Consumption:	Approximately 112W (Maximum)

Dimensions (H x W x D):	44-1/8" x 25-5/8" (29-1/2"****) x 25-7/8" [1121mm x 649mm (748mm****) x 656mm]
Weight:	Approximately 155 lb. (70.5 kg)

### External 2/3-Hole Puncher-A1\*

Acceptable Punch Paper Weight:	14 lb. Bond to 140 lb. Index (52 to 256g/m <sup>2</sup> )
Acceptable Punch Paper Type:	Thin, Plain, Heavy, Color, Recycled, Tab, Coated <sup>††</sup>
Acceptable Punch Paper Size:	11" x 17", Legal, Letter, Letter-R
Punch Type:	2 Holes: Legal, Letter-R 3 Holes: 11" x 17", Letter
Distance Between Punch Holes:	2 Holes: 2-3/4" (70mm) 3 Holes: 4-1/4" (108mm)
Punch Waste Tray Capacity:	Approximately 10,000 Sheets (20 lb. Bond)
Power Source:	From Finisher
Power Consumption:	Approximately 25W (Maximum)
Dimensions (H x W x D):	32-7/8" x 4-1/4" x 24-1/4" (833mm x 107mm x 615mm)
Weight:	Approximately 17 lb. (7.7kg)

### Document Insertion Unit-L1\*

Number of Trays:	1
Acceptable Media:	Covers and Inserts
Tray Capacity:	100 Sheets [20 lb. Bond (80g/m <sup>2</sup> )]
Acceptable Paper Weight:	16 lb. Bond to 140 lb. Index (60 to 256g/m <sup>2</sup> )
Acceptable Paper Type:	Thin, Plain, Heavy, Color, Recycled, Tab, Bond, Letterhead, Coated <sup>††</sup>
Acceptable Paper Size:	11" x 17", Legal, Letter, Letter-R, Executive
Power Requirements:	100-240V/5.0A 50/60Hz
Power Consumption:	Approximately 84W (Maximum)
Plug:	NEMA 5-15P
Dimensions (H x W x D):	48-7/8" x 9-5/8" x 26-3/4" (1242mm x 246mm x 679mm) 48-7/8" x 26-1/8" x 26-3/4" (1242mm x 662mm x 679mm) (with Insertion Feeding Tray)
Weight:	Approximately 88.2 lb. (40kg)

### Document Insertion/Folding Unit-H1\*

Folding Method:	Roller Pressure Folding
Folding Type:	Z-Fold, C-Fold
Acceptable Paper Weight:	<b>Insertion:</b> 16 lb. Bond to 140 lb. Index (60 to 256g/m <sup>2</sup> ) <b>Folding:</b> 16 lb. Bond to 28 lb. Bond (60 to 105g/m <sup>2</sup> )
Acceptable Paper Type:	<b>Insertion:</b> Thin, Plain, Heavy, Color, Recycled, Tab, Bond, Letterhead, Coated <sup>††</sup> <b>Folding:</b> Thin, Plain, Color, Recycled
Acceptable Paper Size:	<b>Z-Fold:</b> 11" x 17", Legal, Letter-R <b>C-Fold:</b> Letter-R <b>Insertion:</b> 11" x 17", Legal, Letter, Letter-R, Executive
Power Requirements:	100-240V AC/5.0A, 50/60Hz
Power Consumption:	Approximately 139W (Maximum)
Dimensions (H x W x D):	48-7/8" x 9-5/8" x 26-3/4" (1242mm x 246mm x 679mm) 48-7/8" x 26-1/8" x 26-3/4" (1242mm x 662mm x 679mm) (with Insertion Feeding Tray)
Weight:	Approximately 168 lb. (76kg)

## Additional Print Controller Options

### imagePASS-U1

Type:	External
Processor:	Intel® Core™ Duo T2500 2.0GHz
System:	System 8 Release 2
Memory:	2GB (Standard/Maximum)
Hard Disk:	80GB
Media Type:	DVD-RW Drive
Interface Connections:	10/100/1000Base-T (RJ-45)
PDL Support:	Adobe PostScript 3/PCL 5e/6
Print Resolution:	1200 x 1200 dpi 2400 dpi Equivalent x 600 dpi
Print Driver Supported OS:	<b>Adobe PS 3:</b> Windows (Windows 2000/XP/7/Server 2003/Server 2008/Windows Vista), Macintosh (OS X 10.3.9 or later) <b>PCL 5e/6:</b> Windows (Windows 2000/XP/7/Server 2003/Windows Vista)
Utility Software:	Remote Scan 5.3, Command WorkStation® for Windows, Command WorkStation for Mac, WebTools
Standard Features:	Hot Folders, Virtual Printers
EFI Options:	<ul style="list-style-type: none"> <li>• SeeSequence Suite</li> <li>• SeeSequence Impose</li> <li>• SeeSequence Compose</li> <li>• Removable Hard Disk Drive</li> <li>• Integrated Interface and Stand (19" display, keyboard, mouse, and furniture stand)</li> </ul>



## Other Optional Accessories

- Utility Tray-A1
- Upright Control Panel-B1
- USB Keyboard
- Card Reader-C1<sup>▲▲</sup>
- Copy Card Reader Attachment Kit-A2
- Braille Label Kit-F1
- ADF Access Handle-A1
- Copy Control Interface Kit-A1
- Convenience Stapler-B1
- PCL Printer Kit-AJ1
- PS Printer Kit-AJ1
- Direct Print Kit (for PDF/XPS)-H1
- Encrypted Secure Print-D1
- Barcode Printing Kit-D1<sup>▲▲▲</sup>
- Web Access Software-H1<sup>■</sup>
- imageRUNNER ADVANCE Essentials
- Universal Send Advanced Feature Set-E1
- Universal Send Security Feature Set-D1
- Universal Send Digital User Signature Kit-C1
- Authorized Send<sup>■</sup>
- Super G3 Fax Board-AF1
- Super G3 2nd Line Fax Board-AF1<sup>■</sup>
- Super G3 3rd/4th Line Fax Board-AE1<sup>□</sup>
- Remote Fax Kit-A1<sup>\*</sup>
- Secure Watermark-B1
- Wireless LAN Board-B1<sup>♦♦</sup>
- USB Device Port-A1
- Multimedia Reader/Writer-A1<sup>♦♦♦</sup>
- Additional Memory Type B (512MB)<sup>◇</sup>
- Document Scan Lock Kit-A2
- Data Erase Kit-C1
- HDD Data Encryption and Mirroring Kit-C2
- Removable HDD Kit-AD1
- 2.5-inch/80GB HDD-C1
- 2.5-inch/250GB HDD-D1
- IP Sec Board-B2<sup>♦♦</sup>
- Expansion Bus-F1
- Voice Guidance Kit-F1
- Remote Operator's Software Kit-B1
- eCopy Suite
- imageWARE Suite

\* Includes ADF and consumables.

\*\* Standard color scan support is up to 300 dpi. Up to 600-dpi scanning requires Additional Memory Type B (512MB).

\*\*\* EPS and XPS cannot be printed directly from the Memory Media or Advanced Box.

† Browsing Advanced Box using SMB is not supported when imagePASS-U1 is attached.

†† Coated paper can only be loaded through the Document Insertion Unit-L1 or Document Insertion/Folding Unit-H1.

††† When the Auxiliary Tray is extended.

▲ Requires Staple Finisher-E1 or Booklet Finisher-E1.

▲▲ Requires the Copy Card Reader Attachment Kit-A1.

▲▲▲ Requires PCL Printer Kit-AJ1.

■ Requires PS Printer Kit-AJ1 or Direct Print Kit (for PDF/XPS)-H1 when printing PDF files.

■ Check with your Authorized Canon Dealer for availability.

■ Requires Super G3 Fax Board-AF1.

□ Requires Super G3 Fax Board-AF1 and Super G3 2nd Line Fax Board-AF1.

◇ Cannot be installed with Super G3 Fax Board-AF1.

♦♦ Requires Expansion Bus-F1.

♦♦♦ Requires USB Device Port-A1.

◇ Required for 600-dpi color scanning.

NOTE: Some accessories require additional equipment or may be prerequisites for other options. Some accessories cannot be installed simultaneously. Check with your Authorized Canon Dealer for details.

**Canon**  
*image*ANYWARE

1-800-OK-CANON  
www.usa.canon.com

Canon U.S.A., Inc.  
One Canon Park  
Melville, NY 11747

As an ENERGY STAR® Partner, Canon U.S.A., Inc. has determined that these products meet the ENERGY STAR guidelines for energy efficiency. ENERGY STAR and the ENERGY STAR mark are registered U.S. marks. CANON, IMAGERUNNER, IMAGEPASS, MEAP, and the GENUINE logo are registered trademarks of Canon Inc. in the United States and may also be registered trademarks or trademarks in other countries. IMAGEWARE is a registered trademark of Canon U.S.A., Inc. in the United States and is a trademark of Canon Inc. in certain other countries. IMAGEANYWARE is a trademark of Canon. All other referenced product names and marks are trademarks of their respective owners and are hereby acknowledged. Some items may not be available at this time; please check for availability. Specifications and availability subject to change without notice.  
©2013 Canon U.S.A., Inc. All rights reserved.

1212RA-6000SS-PDF-NR

